



# BRICKTASTIC

## BRICK & PAVER CLEANER

A powerful, industrial-strength cleaner and degreaser designed for use on clay brick, concrete pavers, stucco, brick facades, hardscaping, artificial and natural stone, ceramic tile, adobe, and other masonry surfaces. This non-abrasive, non-flammable, acid-free formula can be diluted with water to match the demands of any cleaning task—gentle enough for routine maintenance, yet tough on heavy grime and grease.

### Uses

Ideal for both indoor and outdoor use in industrial, commercial, and residential settings. Perfect for cleaning and restoring a wide range of surfaces, including floors, walls, driveways, sidewalks, patios, pool decks, parking garages, retaining walls, hardscapes, and more. Also well-suited for use in historic preservation projects where gentle yet effective cleaning is essential.

### Applicator

Apply using a handheld pump-up sprayer equipped with a fan-tip nozzle. If spray application is not feasible, a brush may be used as an alternative for manual application.



### Surface Preparation

Before application, ensure that all surfaces to be treated are completely dry and free from excessive dirt.

**Protect Surrounding Areas:** Mask or cover any surfaces not intended for treatment, such as glass, metal fixtures, painted surfaces, and landscaping features.

**Vegetation Care:** If nearby plants or vegetation may come into contact with the product—either directly or through runoff—pre-wet them with water. After application, rinse any contacted foliage with water.

**Conditions:** Apply only when surface and ambient air temperatures are between 40°F and 90°F (4°C to 32°C). Avoid use during high winds, rain, or extreme heat to ensure even coverage and proper product performance.

### Spot Test

Due to the variability in masonry composition and surface characteristics, it is recommended to conduct a test application on a small, inconspicuous area prior to full-scale use. Rinse the area thoroughly following application and allow it to dry completely before evaluating suitability and results.

### Dilution

Dilute the product with water according to the specific cleaning requirements of your project. For lighter cleaning tasks or routine maintenance, a higher dilution ratio may be sufficient. For heavy-duty cleaning, grease removal, or heavily soiled surfaces, use a lower dilution ratio for greater cleaning power. Adjust the dilution as needed based on the surface type, condition, and level of contamination.

- **Light Cleaning:** 1 oz per gallon of water
- **Normal Cleaning:** 1 part cleaner / 10 parts water
- **Heavy Cleaning:** 1 part cleaner / 5 parts water
- **Extra Heavy Cleaning:** 1 part cleaner / 1 part water
- **Pressure Wash/Steam Cleaning:** 1 part cleaner / 5-20 parts water
- **Paint & Adhesive Removal:** Use Straight

### Instruction


**Apply Liberally:** Generously apply the cleaner to a dry surface.

**Agitate:** Work the cleaner into the surface using a stiff-bristle brush or broom.

**Dwell Time:** Allow the cleaner to dwell on the surface for 1 to 5 minutes. For tougher stains, longer dwell times may be necessary. Do not allow the cleaner to dry on the surface. Lightly mist with water as needed to keep the surface damp.

**For Challenging Contaminants:** For deep-set oil stains, paint or graffiti removal, or flooring adhesive residue, thoroughly saturate the area with cleaner and cover with a plastic tarp to slow evaporation and extend dwell time.

**Rinse Thoroughly:** Rinse the treated area thoroughly with clean water to remove all cleaner residue.

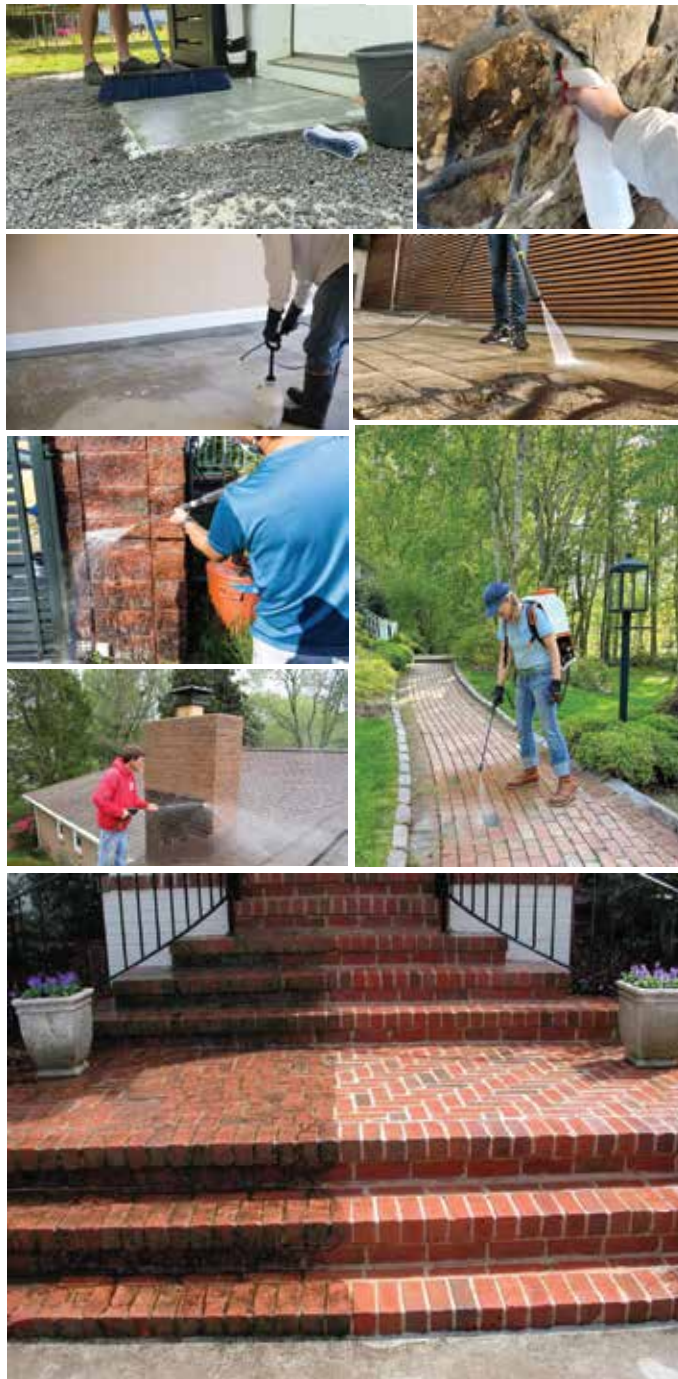

### Clean-Up & Information

**Clean Up:** Rinse tools with water. Remove overspray with a wet towel or sponge before it dries. **Disposal:** Dispose of unused material and empty containers in accordance with local regulations. **Storage:** Store in a cool, dry location out of direct sunlight. Do not freeze.

If you have detailed questions about your application or project please visit RadonSeal.com or contact a RadonSeal customer service representative for expert advice.

1.800.472.0603 or sales@radonseal.com

